


DANISH OIL IS ... DIFFERENT !

WHAT IS DANISH OIL ?

Danish Oil is a special formulation developed by Rustins Ltd. based on tung oil, also known as Chinese Wood Oil.

The oil is extracted from nuts, similar in size to a brazil nut, growing on species of trees found mainly in China and some areas of South America. After processing the oil is blended with synthetic resins, to improve hardness, and other vegetable oils.

Driers and solvents are added to reduce the viscosity, so that the oil may be applied with a rag or brush.

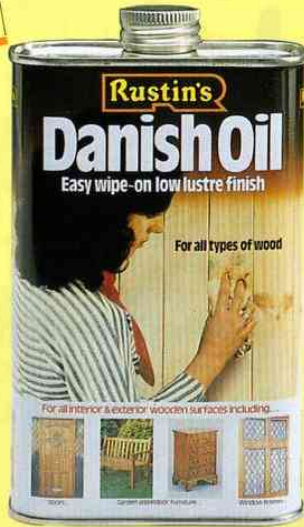

HOW DOES IT DIFFER FROM OTHER WOOD FINISHES ?

The special ingredients used in the manufacture of Danish Oil penetrate deep into all types of timber, drying to a hard, durable and water resistant seal. Unlike varnishes it does not leave a thick film on the surface which may peel, chip or craze on ageing. The oil dries quickly in 4-6 hours, dependent on ambient temperature and humidity, producing a non tacky surface. It does not, therefore, pick up dust or dirt as will wood treated with linseed oil. As it is a hard drying oil, it may be used as a primer or sealer on bare wood before applying other finishes, if required. Danish Oil may be used on interior and exterior woodwork and can be over-coated with a varnish or paint at any time, if it is desired to alter the appearance.



HOW IS IT APPLIED ?

It's so easy

Apply liberally with a clean rag or brush and wipe off the surplus oil after a few minutes.

This process should be repeated twice more for new wood.

Absolutely no skill is required for application, as even when the oil is applied with a brush, it does not have to be brushed out in the same way as a varnish. The brush is merely used to spread the oil liberally over the surface. Danish Oil will bring out the beauty of all timbers and give a natural open-grained soft

lustrous finish. The natural colour of wood may be altered, if required, by staining with Rustin's Wood Dye before treating with Danish Oil. Surfaces that have been treated with other oils may also be wiped over with Danish Oil. Surfaces that have been wax polished however, must be cleaned first with wire wool, white spirit and clean rag. Exterior woodwork, in very exposed conditions, may require re-oiling once a year. Before re-oiling the surface should be cleaned by washing the surface with water and a detergent, making sure that the surface is dry before re-oiling. Alternatively, the surface may be cleaned first with steel wool, white spirit and clean rag. For an outstanding finish the last coat of Danish Oil may be applied by rubbing over the surface with fine steel wool, or with a scouring pad, such as Scotchbrite. This will remove any "nibs" on the surface and leave the surface with a silky-smooth finish.

WHERE CAN IT BE USED ?

On all interior & exterior wooden surfaces including...



Doors...




Garden and indoor furniture...



Window frames...



Pine units...

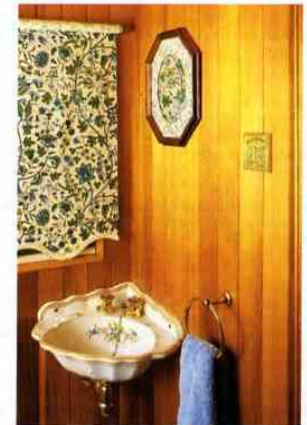

Cladding & Shelving